


# PRODUCT DATA SHEET H15R Core



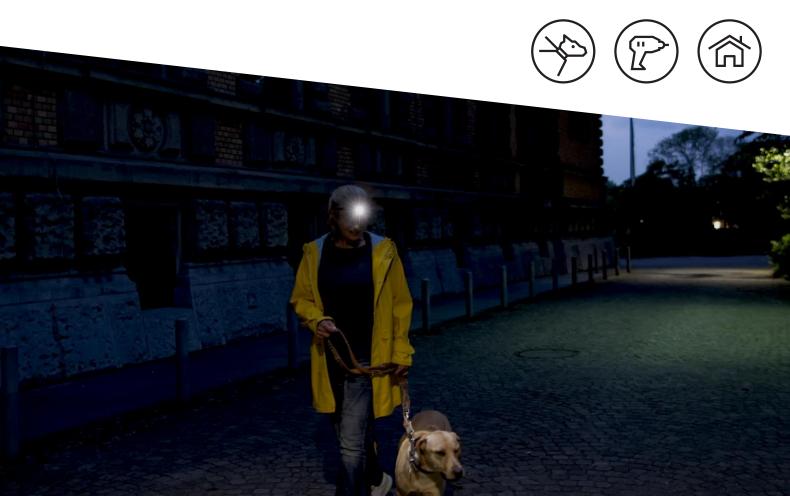

2 - PRODUCT DATA SHEET V200717

# H15R Core

### PRODUCT DESCRIPTION

The H15R Core combines outstanding luminosity and clickless focusability. Long runtimes are guaranteed thanks to its powerful, removable battery with practical Magnetic Charging System. The Wheel Switch on the lamp head makes for easy operation and brightness control, while the lamp head itself rotates seamlessly so you can quickly direct light to where you need it most. And it is well protected from dust and water, making the H15R Core a perfect choice for demanding users.

- Extremely powerful headlamp with our patented<sup>3</sup> Advanced Focus System
- Intuitive operation and stepless dimming with the Wheel Switch
- 120 degrees of lamp head rotation
- Flex Sealing Technology provides superior protection against dust and water (IP67)
- · Ledlenser Connecting System: new standardized interface that offers connection to various accessories

TECHNICAL DATA	
Head diameter [mm]	47
Weight incl. batteries [g]	380
Weight without batteries [g]	230
Focus function	Yes
Head material	PC
Tube material	Aluminum alloy
Optic	Plastic lense (PMMA)
Headband material	Elastic fabric
Headband type	Side overhead headband
Head movement type	Stepless movement
Head movement angle [°]	120
Headband specifications	Detachable,
	Elastic,
	Washable

POWER SUPPLY	
Power source type	Rechargeable battery
Battery quantity	1
Battery type	Li-ion
Battery replaceable	Yes
Total battery voltage [V]	7.4
Total battery capacity [mAh]	4800
Total battery energy <sup>2</sup> [Wh]	35.52
Rechargeable	Yes
Charging time <sup>5</sup> [min]	330
Energy modes	Constant Light
Energy status indicator	Battery Indicator,
	Charge Indicator,
	Low Battery Warning

<b>FURTHER SPECIFICATIO</b>	NS
IP class	IP67
Drop test (drop height) [m]	1.5
Working temperature range [°C]	-20 to +40

#### LIGHT FUNCTIONS

Boost, Power, Low Power

LIGHT SOURCE	
Amount LEDs	1
LED type	Xtreme LED
Color	White
Color temperature [K]	6000 to 7500
Color rendering index (CRI)	70

LIGHT VALUES	5		
ANSI – Constant Light	Boost	Power	Mid Power Low Power
Light output <sup>1</sup> [lm]	2500	1000	20
Beam distance <sup>1</sup> [m]	250	170	20
Run time <sup>1</sup> [h]		5	80

### **SWITCH**

Multifunctional Switch

### FEATURES

 $\label{eq:def:Dimmable} \mbox{Dimmable , Transportation lock , Flicker Free, Memory Function, Back-Up Light}$ 

#### TECHNOLOGIES

Advanced Focus System<sup>3</sup>, Magnetic Charge System, Temperature Control System, Flex Sealing Technology, Cooling Technology, Multi-Core Optics



3 - PRODUCT DATA SHEET V200717

# H15R Core

# PACKAGING AND LOGISTICS



Exemplary Packaging Illustration

### PACKAGING INFORMATION

Type of packaging	Вох
Scope of delivery	1 set of rechargeable batteries, Magnetic charging cable
Item No.	502123
Customs tariff number	85131000000
Color	black
MSRP price (€)	159.00

SINGLE PACKAGE	
Dimensions W x H x D [cm]	14.5 x 12 x 8.5
Gross weight [g]	540
GTIN-13	4058205020930

EXPORT CARTON	
Unit	12
Dimensions W x D x H [cm]	39.5 x 37.5 x 19.5
Gross weight [kg]	7.23
GTIN-13	4058205020954



4 - PRODUCT DATA SHEET V200717

# -H15R Core

# **ACCESORIES**

PRODUCT CATEGORY	ITEM NUMBER	PRODUCT NAME	MSRP
Color filter / Signal caps	502309	Color Filter Set 47mm	19.90€
Fastenings / Brackets	502246	GoPro Adapter Type D	7.90 €
Fastenings / Brackets	502247	Tripod Adapter Type D	9.90 €
Fastenings / Brackets	502253	Belt Clip Type A	6.90 €
Fastenings / Brackets	502314	Helmet Connecting Kit Type H	14.90 €
Fastenings / Brackets	502313	Helmet Band Fixing Clip Type A	4.90 €
Fastenings / Brackets	502256	Universal Mounting Bracket Type E	12.90 €
Battery	502310	2x 21700 Li-ion Rechargeable Battery Pack	39.90 €
Battery	502411	Bluetooth 2x 21700 Batterybox	59.90 €
Charger / Cable	502265	Magnetic Charging Cable Type A	6.90 €
Charger / Cable	502312	Extension Cable Type C	9.90 €
Fastenings / Brackets	502451	Transparent Silicone Headband Type A	9.90 €
Charger / Cable	502271	USB Adapter 2.4A	14.90 €



5 - PRODUCT DATA SHEET v200717

# H15R Core

### **PRODUCT SERIES**

The Ledlenser H-series offers best-in-class headlamps with reliable lighting that can be used in many applications. The H-series lamps are indispensable for a broad range of users in private and professional environments. The high product quality, the intuitive operation, the ergonomic design and last but not least the unmatched light pattern have led this series to great success. With every product in the H-series being completely redesigned with forward-thinking new technologies and features, Ledlenser has extensively raised the bar with this collection of lights. The new H-series is also the first Ledlenser range of flashlights designed for all user fields. The products of the Core, Work, and Signature range have different designs and features and are therefore tailormade for different target groups.

The Core headlamps are the foundation of the H-series. They can be operated intuitively and offer stepless dimming via the Wheel Switch on the lamp head (except H19R Core). In addition, the headlamps provide an improved constant luminous flux so that the selected brightness can be maintained over a long period of time. Thanks to the Flex Sealing Technology, all models achieve extreme dust and water protection (at least IP67). These and many other features as well as the extensive range of accessories that can be used universally with the Ledlenser Connecting System, make the Core headlamps of the H-series ideal all-rounders for a variety of uses and activities.

## **FOOTNOTES**

The information pertaining to scope of delivery, appearance, performance, dimensions and weight corresponds to the information available at the time of publication. In the interest of product development, we reserve the right to change scope of delivery, appearance, design and color without prior notice. Product images may vary from the actual products and may show optional accessories which can be purchased separately. Errors and omissions excepted.

- 1) Measurement values according to ANSI FL1 in the respective setting. If no setting is explicitly indicated, the values refer to luminous flux (lumens/lm) and lighting range (meters/m) on the highest setting, and to battery duration (hours/hrs/h) on the lowest setting. A boost function (if available) can be used several times, but only for short periods of time. If the light is equipped with (a) colored LED(s), the measurement values are given for the white light or the white LED. If the light has different energy modes, the measurement is made based on the "energy saving mode".
- 2) Calculated capacity value in watt-hours (Wh). This applies to the delivery state of the battery/ies inside the respective item, or for lights with rechargeable battery/ies, to the rechargeable battery/ies inside the product when fully charged.
- 3) EP Patent 1880139, US Patent 7,461,960
- 5) Charging time varies by hardware used.

